



PRODUCT LED LIGHTING

CATALOGUE

MIDEA LIGHTING

Midea Intelligent Lighting & Controls Technology Co., Ltd

Add: No. 1 Industrial Estate,Guixi City,Jiangxi,China

Web: www.mdlighting.com

Company reserve the right to change product design an specifications,print products have deviation with real images,select a product in kind prevail,at the appointed time without prior notice!

From Fortune Global 500 Companies



COMPANY PROFILE

1968

Midea was founded in 1968

Midea was founded in 1968, which is a renowned sizeable conglomerate for manufacturing household appliances. In the previous decade, Midea had been continued to enlarge its business scope not only in real estates, also specialize in logistics transportation. With all rapid developing, Midea has become the top of white household appliance production bases and export bases in China.

2008

Midea launched its lighting products

In early 2008 Midea launched its lighting products. Midea Lighting was set up and has owned groups of brilliant lighting technical professionals and global marketing networkers in order to contribute to lighting products' development.

30⁺

30 national and international authentications

In 2015, Midea Lighting had transformed it overall into LED lighting field. On one hand, it equipped with high quality, well-experienced research and development technical teams. On the other hand, it brought in series of international leading production equipment from Japan, U.S, and Germany etc. As the technical development improving, Midea Lighting had the honor to win multiple patent achievements that contributed to be a leading brand in LED field. Not only passed CCC/CQC/ENERGY STAR/UL/PSE/INMETRO/CE and so on, including 30 national and international authentications. Also we owned the ISO9001 quality management system certification.

3000

More than 3000 distributors in China


Midea Lighting deeply integrated the channel resources, reformed the channel modes, specialized in professional channels, meanwhile it continues the expansion of engineering, KA, and E-commerce. We've been building up a large scale of distribution network that covers 36 provinces and cities with in China, the main sale areas, and more than 3000 distributors. Nowadays, Midea Lighting has owned various kinds of channels, terminal commercial networks, in which our products have been sold to more than 30 countries and regions, such as Europe, South America, Australia, and Southeast Asia. In order to provide high quality products and services for global customers and users, Midea Lighting has been developing for becoming an expert on applied overall lighting solution.

30⁺

Sold to more than 30 countries and regions

PROJECT APPLICATION

HOME

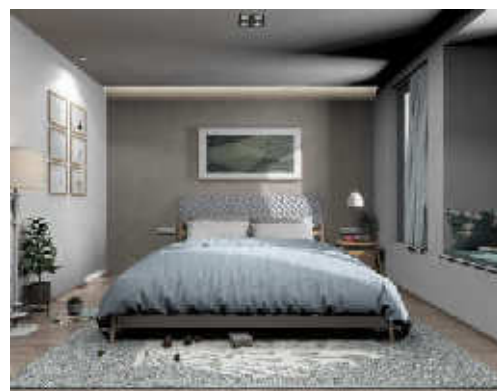

OFFICE



SHOPPING CENTER



HOTEL



PROJECT APPLICATION



EXHIBITION




OUTDOOR



INDUSTRY




GYM

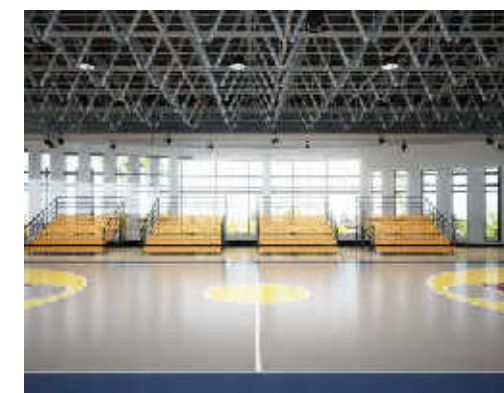

CATALOG

LED Light Source

01-10

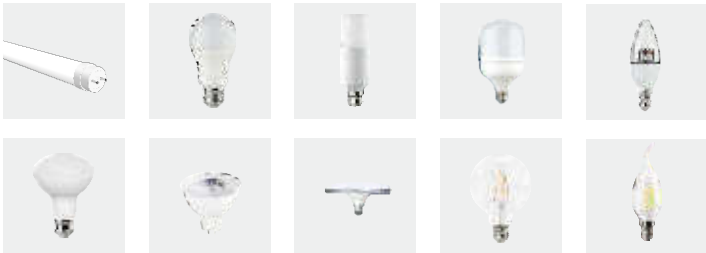


LED Downlight

11-17



LED Spotlight

18-21

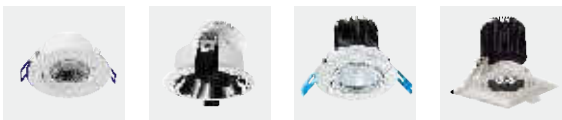


LED Track Light

22-24



LED Linear Light

25-31

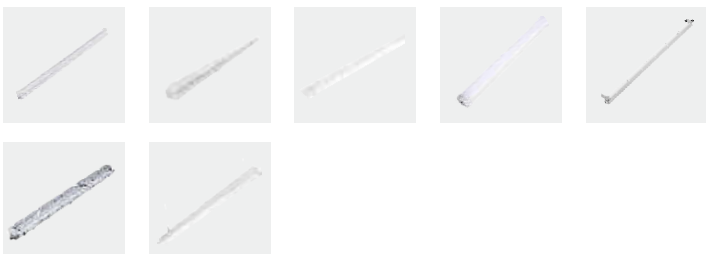

32-36

LED Panel




37-40

LED Ceiling Light



41-42

LED Strip Light



43-43

LED Highbay



44-46

LED Flood Light



47-49

LED Street Light





LED Light source



- 01 LED T8 Tube
- 02 LED A Bulb
- 03 LED Stick Lamp
- 04 LED High-Power Bulb
- 05 LED Candle
- 06 LED R63/R80
- 07 LED MR16
- 08 LED UFO
- 09 LED Filament Bulb
- 10 LED Filament Candle




LED T8 Tube

- High Efficiency, up to 100lm/W
- Single end or double ends is optional
- Stress free ambient light, flicker free
- Last 2 times longer than conventional T8 Tube
- CB certification & EMC
- CCT:3000K/6500K is optional

Product advantages

Application Place



Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size D*L(mm)	CTN Size (mm)	PCS/CTN
Double ends:								
MDL-TUT809W	9	900	100	80	0.5	28*589	655*185*185	25
MDL-TUT818W	18	1800	100	80	0.5	28*1198	1255*185*185	25
MDL-TUT820W	20	2000	100	80	0.5	28*1198	1255*185*185	25
Single end:								
MDL-TUT809W-S3/S6	9	900	100	80	0.5	28*589	625*165*167	25
MDL-TUT818W-S3/S6	18	1800	100	80	0.5	28*1198	1250*178*175	25
MDL-TUT824W-S3/S6	24	2400	100	80	0.5	28*1498	1550*180*180	25





LED A Bulb

- Illuminate anywhere you need with comfortable light
- Comfortable light design, no flicker
- Optimal heat management, up to 20Khrs lifetime
- 220-240V~/100-240V~,voltage is optional
- E27/B22/E14 lamp holder is optional
- CB certification & EMC
- 3000K/6500k/Red/Green/Blue is optional



Product advantages

Application Place

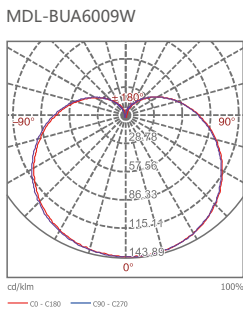



Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size D*L(mm)	CTN Size (mm)	PCS/CTN
MDL-BUA4503W	3	300	100	80	0.5	45*77	470*240*175	100
MDL-BUA4505W	5	500	100	80	0.5	45*77	470*240*175	100
MDL-BUA6006W	6	600	100	80	0.5	60*107	620*315*230	100
MDL-BUA6007W	7	700	100	80	0.5	60*107	620*315*230	100
MDL-BUA6009W	9	900	100	80	0.5	60*107	620*315*230	100
MDL-BUA6012W	12	1200	100	80	0.5	60*120	620*315*255	100
MDL-BUA6015W	15	1500	100	80	0.5	60*120	620*315*255	100



Product advantages



Application Place

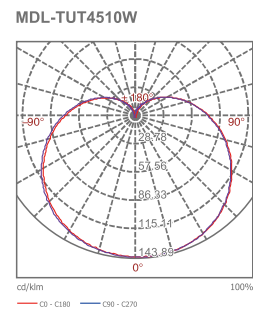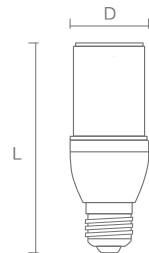

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size D*L(mm)	CTN Size (mm)	PCS/CTN
MDL-TUT3807W	7	700	100	80	0.5	37*116	410*210*252	100
MDL-TUT4510W	10	1000	100	80	0.5	45*137	470*240*295	100
MDL-TUT8018W	18	1800	100	80	0.5	80*142	520*435*175	30





LED High-Power Bulb

- Up to 50% energy savings compared with CFL
- 2.5 times lifetime longer than CFL, up to 20Khrs
- E27/B22 lamp holder is optional
- PF>0.5/PF>0.9 is optional
- CE certification & EMC
- CCT:3000K/6500K is optional

Product advantages



Application Place

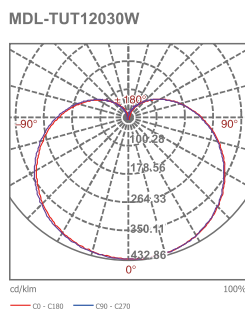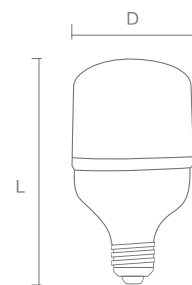


Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size D*L(mm)	CTN Size (mm)	PCS/CTN
MDL-TUT12030W	30	3000	100	80	0.9	118*209	380*255*248	6
MDL-TUT14040W	40	4000	100	80	0.9	138*238	585*265*305	8
MDL-TUT16050W	50	5000	100	80	0.9	160*264	508*342*300	6
MDL-TUT10026W-02	26	2600	100	80	0.5	99*181	515*515*380	50
MDL-TUT12035W-02	35	3500	100	80	0.5	113*202	595*480*425	40
MDL-TUT14045W-02	45	4500	100	80	0.5	135*244	570*430*510	24



LED Candle


- Ideal for use in chandeliers, easy to match fixture color
- >50% energy savings compared to conventional bulb
- Milk/Transparent body is optional
- E14 lamp holder, CE certification & EMC
- CCT:3000K/6500K is optional

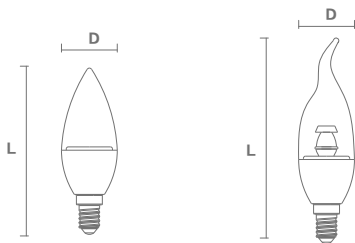

Product advantages



Application Place

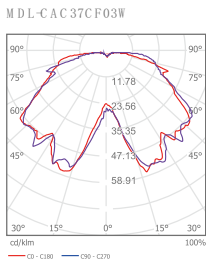


Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size D*L(mm)	CTN Size (mm)	PCS/CTN
MDL-CAC37M03W	3	300	100	80	0.5	35*103	390*200*230	100
MDL-CAC37M05W	5	500	100	80	0.5	35*103	390*200*230	100
MDL-CAC37M65W	6.5	750	115	80	0.5	35*103	390*200*230	100
MDL-CAC37MF03W	3	300	100	80	0.5	35*126	390*200*270	100
MDL-CAC37MF05W	5	500	100	80	0.5	35*126	390*200*270	100
MDL-CAC37MF65W	6.5	750	115	80	0.5	35*126	390*200*270	100
MDL-CAC37C03W	3	270	90	80	0.5	35*103	390*200*230	100
MDL-CAC37C05W	5	450	90	80	0.5	35*103	390*200*230	100
MDL-CAC37CF03W	3	270	90	80	0.5	35*126	390*200*270	100
MDL-CAC37CF05W	5	450	90	80	0.5	35*126	390*200*270	100



LED R63/R80


- Optimized optical design allows use in downlight without reflectors
- Up to 50% energy savings compared with CFL
- Optimal heat management, up to 20Khrs lifetime
- E27 lamp holder, CE certification & EMC
- CCT:3000K/6500K is optional



Product advantages



Application Place

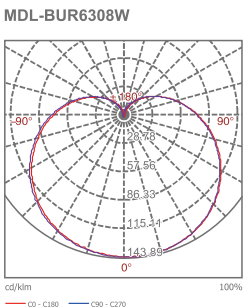

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size D*L(mm)	CTN Size (mm)	PCS/CTN
MDL-BUR6308W	8	800	100	80	0.5	63*94	650*330*210	100
MDL-BUR8012W	12	1200	100	80	0.5	Φ80*114	500*338*255	48



LED MR16



- Easy to replace 35-75W halogen lamp
- Optimal heat management
- GU10/GU5.3 Lamp holder is optional
- Dimming is optional
- CE certification & EMC
- CCT:3000K/6500K is optional



Product advantages



Application Place

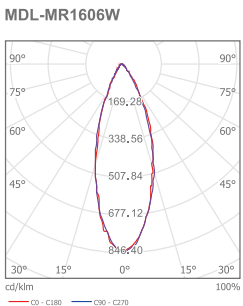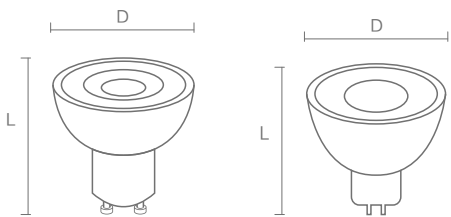

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size D*L(mm)	CTN Size (mm)	PCS/CTN
MDL-GU1007W	7	630	90	80	0.5	50*56	270*270*272	100
MDL-GU1007W-02	7	630	90	80	0.5	50*56	270*270*272	200
MDL-MR1606W	6	630	90	80	0.5	50*48	530*270*230	100
MDL-MR1645W-02	5	350	77	80	0.5	50*48	530*270*230	200



LED UFO



- Optimal heat management, Aluminum body
- 2.5 times lifetime longer than CFL
- Up to 50% energy savings compared with CFL
- E27 lamp holder, CE certification & EMC
- CCT:3000K/6500K is optional



Product advantages



Application Place

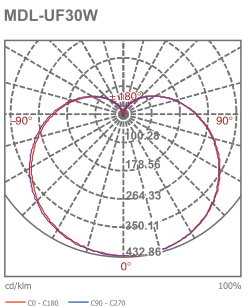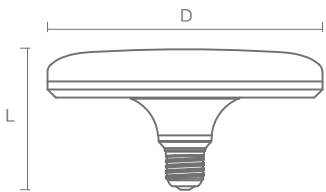


Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size D*L(mm)	CTN Size (mm)	PCS/CTN
MDL-UF15W	15	1350	90	80	0.5	155*99	530*325*485	30
MDL-UF24W	24	2160	90	80	0.5	190*99	530*400*400	20
MDL-UF30W	30	2700	90	80	0.5	220*100	530*460*460	20



LED Filament Bulb

- Could replace incandescent lamps directly
- Reach the same lighting effect as incandescent bulbs
- Above 124lm/W efficiency and 360° beam angle
- E27/B22 lamp holder is optional, Dimming is optional
- Transparent/Golden/ Milky body is optional
- CE certification & EMC
- CCT:2700K/2200K is optional

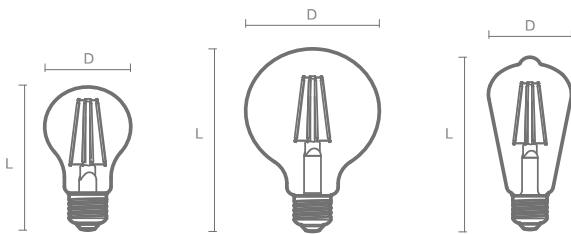


Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size D*L(mm)	CTN Size (mm)	PCS/CTN
MDL-FBA6045W	4.5	470	105	80	0.5	60*108	340*139*130	10
MDL-FBA6065W	6.5	806	115	80	0.5	60*108	340*139*130	10
MDL-FBA6085W	8.5	1055	124	80	0.5	60*108	340*139*130	10
MDL-FBG4545W	4.5	470	105	80	0.5	45*80	209*158*105	12
MDL-FBG9565W	6.5	806	115	80	0.5	95*140	314*211*168	6
MDL-FBG12085W	8.5	1055	124	80	0.5	125*178	450*317*200	6
MDL-FBST64M45W	4.5	470	105	80	0.5	64*140	218*147*162	6
MDL-FBST64M65W	6.5	806	115	80	0.5	64*140	218*147*162	6
MDL-FBST64M85W	8.5	1055	115	80	0.5	64*140	218*147*162	6
MDL-FBST64C45W	4.5	470	105	80	0.5	64*140	218*147*162	6
MDL-FBST64C65W	6.5	806	115	80	0.5	64*140	218*147*162	6
MDL-FBST64C85W	8.5	1055	124	80	0.5	64*140	218*147*162	6



Product advantages




Application Place



LED Filament Candle

- Could replace incandescent lamps directly
- Reach the same lighting effect as incandescent bulbs
- Above 124lm/W efficiency and 360° beam angle
- E27/B22 lamp holder is optional, Dimming is optional
- Transparent/Golden/ Milky body is optional
- CE certification & EMC
- CCT:2700K/2200K is optional

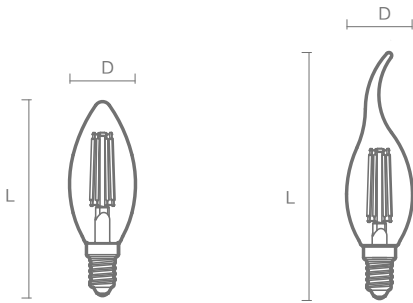


Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size D*L(mm)	CTN Size (mm)	PCS/CTN
MDL-FBC35M25W	2.5	250	100	80	0.5	35*97	250*130*120	10
MDL-FBC35M45W	4.5	470	105	80	0.5	35*97	250*130*120	10
MDL-FBC35MF25W	2.5	250	100	80	0.5	35*123	243*122*140	10
MDL-FBC35MF45W	4.5	470	105	80	0.5	35*123	243*122*140	10



Product advantages



Application Place

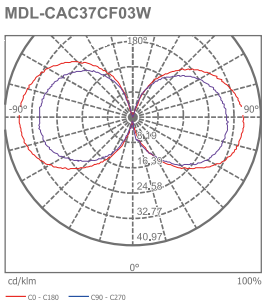



LED Downlight



- 11 LED Down Light Basic
- 12 LED Down Light Round
- 13 LED Down Light Square
- 14 LED Surfaced Downlight Round
- 15 LED Surfaced Downlight Square
- 16 LED COB Downlight
- 17 LED Downlight Professional




LED Downlight Basic

- Ultra-thin to 30mm, 2.5-6 inch is optional
- 85% lower energy consumption than CFL downlight
- Driver on board, excellent heat dissipation
- Over 20,000 hours lifespan
- CE certification & EMC
- CCT:3000K/6500K is optional


Product advantages



Application Place

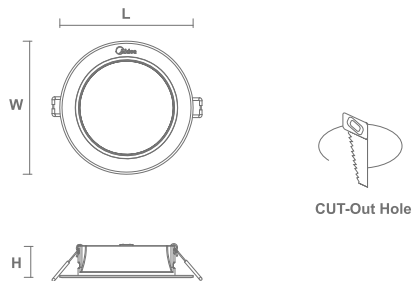

MDL-DL35R08W-03

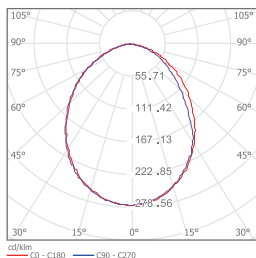

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Cut-out Size (mm)	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-DL25R04W-03	4	280	70	80	0.5	Φ75-85	100*100*30	540*230*308	50
MDL-DL30R06W-03	6	450	75	80	0.5	Φ85-95	112*112*30	488*250*308	40
MDL-DL35R08W-03	8	680	85	80	0.5	Φ105-115	125*125*30	540*277*308	40
MDL-DL40R10W-03	10	900	90	80	0.5	Φ115-125	137*137*30	588*300*308	40





LED Downlight Round

- Ultra-thin design with built-in LED Driver
- Better texture, finely granular surface
- Lower height, height 30~35mm, easy to install
- PF>0.7/PF>0.5 is optional
- CB certification & EMC
- CCT:3000K/6500K is optional

Product advantages



Application Place

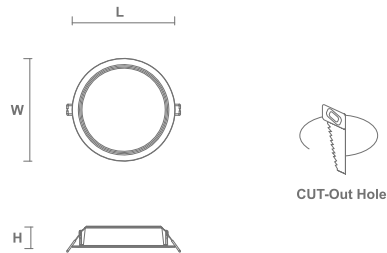


Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Cut-out Size (mm)	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-DL04R06W	6	480	80	80	0.7	Φ100-110	125*125*30	460*275*290	40
MDL-DL04R08W	8	640	80	80	0.7	Φ100-110	125*125*30	460*275*290	40
MDL-DL06R10W	10	800	80	80	0.7	Φ150-160	175*175*35	510*378*390	40
MDL-DL06R12W	12	960	80	80	0.7	Φ150-160	175*175*35	510*378*390	40
MDL-DL06R14W	14	1120	80	80	0.7	Φ150-160	175*175*35	510*378*390	40
MDL-DL08R16W	16	1280	80	80	0.7	Φ200-215	230*230*35	510*490*260	20
MDL-DL08R18W	18	1440	80	80	0.7	Φ200-215	230*230*35	510*490*260	20
MDL-DL10R20W	20	1800	90	80	0.7	Φ250-270	290*290*35	610*412*320	16
MDL-DL10R24W	24	2160	90	80	0.7	Φ250-270	290*290*35	610*412*320	16
MDL-DL04R06W-02	6	480	80	80	0.5	Φ100-110	125*125*30	460*275*290	40
MDL-DL06R12W-02	12	960	80	80	0.5	Φ150-160	175*175*35	510*378*390	40
MDL-DL06R16W-02	16	1280	80	80	0.5	Φ150-160	175*175*35	510*378*390	40
MDL-DL08R24W-02	24	1920	80	80	0.5	Φ200-215	230*230*35	510*490*260	20





LED Downlight Square

- Ultra-thin design with built-in LED Driver
- Better texture, finely granular surface
- Lower height, height 30~35mm, easy to install
- PF>0.7/PF>0.5 is optional
- CB certification & EMC
- CCT:3000K/6500K is optional



CUT-Out Hole




Product advantages



Application Place



MDL-DL04S08W




Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Cut-out Size (mm)	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-DL04S06W	6	480	80	80	0.7	100-110	125*125*30	450*280*325	40
MDL-DL04S08W	8	640	80	80	0.7	100-110	125*125*30	450*280*325	40
MDL-DL06S10W	10	800	80	80	0.7	150-160	175*175*35	500*378*415	40
MDL-DL06S12W	12	960	80	80	0.7	150-160	175*175*35	500*378*415	40
MDL-DL06S14W	14	1120	80	80	0.7	150-160	175*175*35	500*378*415	40
MDL-DL08S16W	16	1280	80	80	0.7	200-215	230*230*35	500*490*285	20
MDL-DL08S18W	18	1440	80	80	0.7	200-215	230*230*35	500*490*285	20
MDL-DL10S20W	20	1800	90	80	0.7	250-270	290*290*35	610*410*335	16
MDL-DL10S24W	24	2160	90	80	0.7	250-270	290*290*35	610*410*335	16
MDL-DL04S06W-02	6	480	80	80	0.5	100-110	125*125*30	450*280*325	40
MDL-DL06S12W-02	12	960	80	80	0.5	150-160	175*175*35	500*378*415	40
MDL-DL06S16W-02	16	1280	80	80	0.5	150-160	175*175*35	500*378*415	40
MDL-DL08S24W-02	24	1920	80	80	0.5	200-215	230*230*35	500*490*285	20



LED Surfaced Downlight Round

- Ultra-thin design with built-in LED Driver
- Better texture, finely granular surface
- Surface installtion, 4-10 inch is optional
- PF>0.7/PF>0.5 is optional
- CB certification & EMC
- CCT:3000K/6500K is optional




Product advantages



Application Place



MDL-DLM04R08W




Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-DLM04R06W	6	480	80	80	0.7	125*125*38	460*275*290	40
MDL-DLM04R08W	8	640	80	80	0.7	125*125*38	460*275*290	40
MDL-DLM06R10W	10	800	80	80	0.7	175*175*43	510*378*390	40
MDL-DLM06R12W	12	960	80	80	0.7	175*175*43	510*378*390	40
MDL-DLM06R14W	14	1120	80	80	0.7	175*175*43	510*378*390	40
MDL-DLM08R16W	16	1280	80	80	0.7	230*230*43	510*490*260	20
MDL-DLM08R18W	18	1440	80	80	0.7	230*230*43	510*490*260	20
MDL-DLM10R20W	20	1800	90	80	0.7	290*290*43	610*412*320	16
MDL-DLM10R24W	24	2160	90	80	0.7	290*290*43	610*412*320	16
MDL-DLM04R06W-02	6	480	80	80	0.5	125*125*38	460*275*290	40
MDL-DLM06R12W-02	12	960	80	80	0.5	175*175*43	510*378*390	40
MDL-DLM06R16W-02	16	1280	80	80	0.5	175*175*43	510*378*390	40
MDL-DLM08R24W-02	24	1920	80	80	0.5	230*230*43	510*490*260	20



LED Surfaced Downlight Square

- Ultra-thin design with built-in LED Driver
- Better texture, finely granular surface
- Surface installtion, 4-10 inch is optional
- PF>0.7/PF>0.5 is optional
- CB certification & EMC
- CCT:3000K/6500K is optional



Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-DLM04S06W	6	480	80	80	0.7	125*125*38	460*275*290	40
MDL-DLM04S08W	8	640	80	80	0.7	125*125*38	460*275*290	40
MDL-DLM06S10W	10	800	80	80	0.7	175*175*43	510*378*390	40
MDL-DLM06S12W	12	960	80	80	0.7	175*175*43	510*378*390	40
MDL-DLM06S14W	14	1120	80	80	0.7	175*175*43	510*378*390	40
MDL-DLM08S16W	16	1280	80	80	0.7	230*230*43	510*490*260	20
MDL-DLM08S18W	18	1440	80	80	0.7	230*230*43	510*490*260	20
MDL-DLM10S20W	20	1800	90	80	0.7	290*290*43	610*412*320	16
MDL-DLM10S24W	24	2160	90	80	0.7	290*290*43	610*412*320	16
MDL-DLM04S06W-02	6	480	80	80	0.5	125*125*38	460*275*290	40
MDL-DLM06S12W-02	12	960	80	80	0.5	175*175*43	510*378*390	40
MDL-DLM06S16W-02	16	1280	80	80	0.5	175*175*43	510*378*390	40
MDL-DLM08S24W-02	24	1920	80	80	0.5	230*230*43	510*490*260	20




Product advantages



Application Place



MDL-DLM04S08W



LED COB Downlight


- COB LED, Comfortable and Efficient light
- Compact shape for shallow ceiling cavities
- Optimal heat management, Aluminum body
- High-performance nano reflector, 100lm/W
- Sliver/white reflector is optional
- CCT:3000K/6500K is optional



Product advantages




Application Place



CUT-Out Hole

MDL-DL06R20W-04



Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Cut-out Size (mm)	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-DL25R07W-04	7	630	90	80	0.9	Φ65	91*91*50	540*505*220	100
MDL-DL04R10W-04	10	1000	100	80	0.9	Φ100	127*127*50	540*420*300	60
MDL-DL05R15W-04	15	1500	100	80	0.9	Φ140	172*172*52	570*360*365	40
MDL-DL06R20W-04	20	2000	100	80	0.9	Φ140	172*172*52	570*360*365	40
MDL-DL08R30W-04	30	3000	100	80	0.9	Φ195	222*222*52	570*470*245	20



LED Downlight Professional



- COB LED, Comfortable and Efficient light
- Optimal heat management, Aluminum body
- High-performance reflector, 100lm/W&High PF, ≥ 0.9
- CB certification & EMC
- CCT:3000K/6500K is optional




Product advantages



Application Place

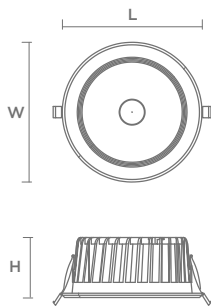

CUT-OUT HOLE

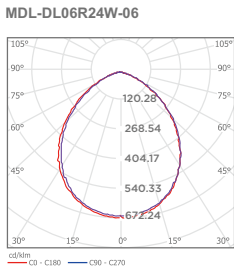

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Cut-out Size (mm)	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-DL03R07W-06	7	595	85	80	0.9	Φ85	105*105*95	440*335*210	24
MDL-DL35R09W-06	9	855	95	80	0.9	Φ100	120*120*105	500*380*230	24
MDL-DL04R12W-06	12	1140	95	80	0.9	Φ125	150*150*115	470*320*250	12
MDL-DL05R15W-06	15	1500	100	80	0.9	Φ150	175*175*125	545*370*270	12
MDL-DL06R24W-06	24	2400	100	80	0.9	Φ180	205*205*140	635*430*300	12
MDL-DL08R35W-06	35	3500	100	80	0.9	Φ210	240*240*150	720*500*320	12





LED Spotlight



- 18 LED Spotlight Basic
- 19 LED Spotlight Premium
- 20 LED Spotlight Professional
- 21 LED Spotlight Grid



LED Spotlight Basic



- New designed optical lens, comfortable light
- Optimal heat management, Aluminum body
- Flicker free could reduce stress
- 24°/30° Beam angle is optional
- CE certification & EMC
- CCT:3000K/6500K is optional



Product advantages



Application Place

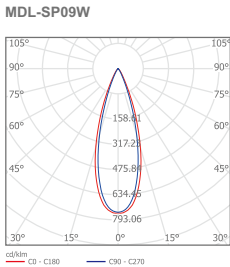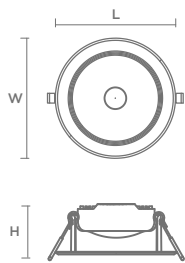

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Cut-out Size (mm)	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-SP03W	3	210	70	80	0.5	Φ50-58	68*68*44	365*255*300	100
MDL-SP06W	6	510	85	80	0.5	Φ70-80	85*85*46	365*285*370	80
MDL-SP09W	9	810	90	80	0.5	Φ85-95	105*105*54	445*305*340	60
MDL-SP03W-01	3	270	90	80	0.5	Φ70-80	91*91*37	495*295*400	100
MDL-SP05W-01	5	450	90	80	0.5	Φ70-80	91*91*37	495*295*400	100
MDL-SP07W-01	7	630	90	80	0.5	Φ90-100	110*110*39	595*320*480	100
MDL-SP8.5W-01	9	765	90	80	0.5	Φ90-100	110*110*39	595*320*480	100



LED Spotlight Premium



- New designed optical lens and great COB LED
- Optimal heat management, Aluminum body
- Flicker free could reduce stress
- 20°/30° Beam angle is optional
- CB certification & EMC
- CCT:3000K/6500K is optional



Product advantages



Application Place





Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Cut-out Size (mm)	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-SP05W-02A	5	350	70	80	0.5	Φ75	89*89*52	493*303*292	60
MDL-SP05W-02B	5	350	70	80	0.5	Φ75	89*89*52	493*303*292	60
MDL-SP06W-02C	6	360	60	80	0.5	Φ65	78*78*50	418*273*280	60
MDL-SP06W-02D	6	360	60	80	0.5	Φ75	92*92*58	493*303*292	60
MDL-SP06W-02E	6	450	75	80	0.5	Φ75	87*87*66	468*300*336	60
MDL-SP06W-02F	6	420	70	80	0.5	Φ75	87*87*66	468*300*336	60
MDL-SP06W-02G	6	390	65	80	0.5	Φ75	87*87*66	468*300*336	60



Product advantages



Application Place

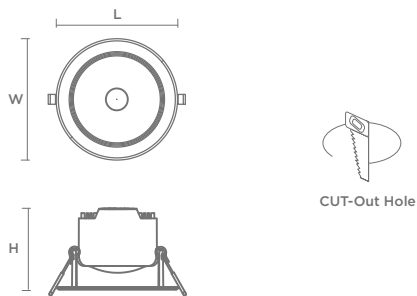

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Cut-out Size (mm)	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-SP05W-03	5	450	75	80	0.9	Φ55	64*64*40	425*325*280	48
MDL-SP07W-03	7	675	75	80	0.9	Φ75	87*87*55	425*325*280	48
MDL-SP09W-03	9	1275	85	80	0.9	Φ75	87*87*55	425*325*280	48
MDL-SP12W-03	12	1200	100	80	0.9	Φ75	87*87*55	425*325*280	48
MDL-SP15W-03	15	1500	100	80	0.9	Φ95	110*110*85	485*255*290	24
MDL-SP20W-03	20	2000	100	80	0.9	Φ95	110*110*85	485*255*290	24
MDL-SP24W-03	24	2400	100	80	0.9	Φ95	110*110*85	485*255*290	24





LED Spotlight Grid

- Flexible adjustment for accent lighting
- High performance reflector, 90lm/W
- Optimal heat management, Aluminum body
- Flicker free could reduce stress
- CE certification & EMC
- CCT:3000K/6500K is optional

Product advantages



Application Place

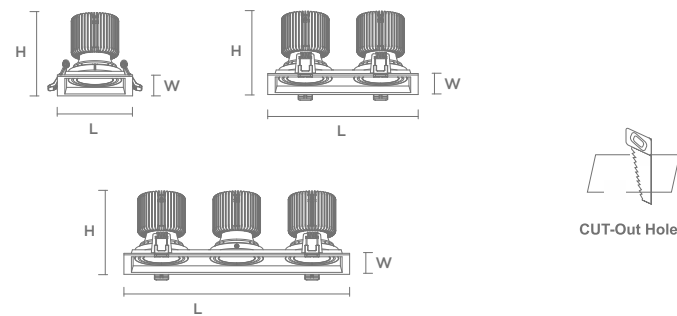

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Cut-out Size (mm)	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-SP12W-04	12	1080	90	80	0.9	80*80	95*95*90	500*380*350	36
MDL-SP15W-04	15	1350	90	80	0.9	80*80	95*95*90	500*380*350	36
MDL-SP24W-04	24	2160	90	80	0.9	100*100	118*118*115	470*470*410	27
MDL-SP35W-04	35	3150	90	80	0.9	135*135	155*155*140	540*365*470	18
MDL-SPD12W-04	2*12	1620	90	80	0.9	175*80	190*95*90	445*405*350	18
MDL-SPD15W-04	2*15	2700	90	80	0.9	175*80	190*95*90	445*405*350	18
MDL-SPD24W-04	2*24	4320	90	80	0.9	215*100	231*118*115	520*295*425	12
MDL-SPD35W-04	2*35	6300	90	80	0.9	280*135	300*155*140	355*540*485	9
MDL-SPS12W-04	3*12	2430	90	80	0.9	270*80	285*95*90	410*340*460	12
MDL-SPS15W-04	3*15	4050	90	80	0.9	270*80	285*95*90	410*340*460	12
MDL-SPS24W-04	3*24	6480	90	80	0.9	326*100	344*115*115	380*435*430	9
MDL-SPS35W-04	3*35	9450	90	80	0.9	425*135	445*155*140	485*540*350	6



LED Track light



- 22 LED Track Light 2 Line
- 23 LED Track Light 3 Line
- 24 LED Ceiling Tracklight



LED Tracklight 2 lines


- Uniform light beam with clean beam angle
- Flexible to highlight the displayed goods
- Efficient COB chips work with comfortable light
- 2 lines track, CE certification & EMC
- CCT:3000K/6500K is optional




Product advantages



Application Place



MDL-TL242TW09W

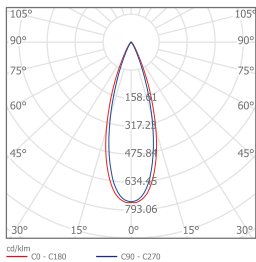

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-TL242TW05W	5	300	60	80	0.5	50*100*151	505*285*505	48
MDL-TL242TW09W	9	540	60	80	0.5	50*100*151	505*285*505	48
MDL-TL242TB05W	5	300	60	80	0.5	50*100*151	505*285*505	48
MDL-TL242TB09W	9	540	60	80	0.5	50*100*151	505*285*505	48



LED Tracklight 3 lines


- Uniform light beam with clean beam angle
- Flexible to highlight the displayed goods
- Efficient COB chips work with comfortable light
- 24°/36° Beam angle is optional
- 3 lines track, CE certification & EMC
- CCT:3000K/6500K is optional




Product advantages



Application Place



MDL-TL3L09W

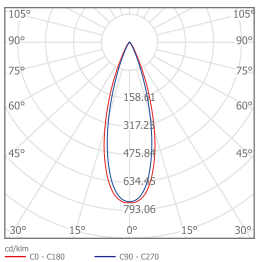


Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-TL3L09W	9	585	65	80	0.5	70*150*165	500*195*340	12
MDL-TL3L15W	15	1050	70	80	0.5	70*150*165	500*195*340	12
MDL-TL3L24W	24	1800	75	80	0.5	80*160*165	560*195*360	12
MDL-TL3L30W	30	2100	70	80	0.9	95*170*180	650*210*380	12





LED Ceiling Tracklight

- Uniform light beam with clean beam angle
- Flexible to highlight the displayed goods
- Efficient COB chips work with comfortable light
- 24°/36° Beam angle is optional
- Ceiling installtion, CE certification & EMC
- CCT:3000K/6500K is optional

Product advantages



Application Place




Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-TLCL09W	9	585	65	80	0.5	50*100*142	535*280*425	36
MDL-TLCL15W	15	1050	70	80	0.5	50*130*138	535*280*425	36
MDL-TLCL24W	24	1800	75	80	0.5	66*156*157	575*355*475	36
MDL-TLCL30W	30	2100	70	80	0.9	77*193*182	505*385*545	36





LED Linear Light

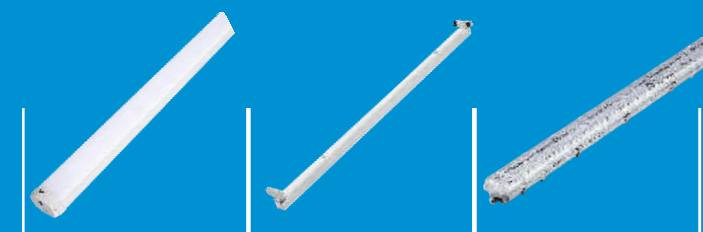



- 25 LED T5 Batten
- 26 LED T8 Batten
- 27 LED Batten Basic
- 28 LED Waterproof
- 29 LED Bracket Basic
- 30 LED Bracket IP65
- 31 LED Linear Light




Product advantages



Application Place

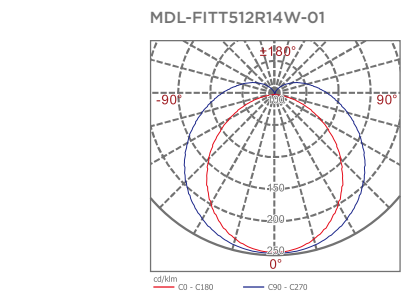


Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-FITT503R04W-01	4	380	95	80	0.5	310*22*35	375*142*195	25
MDL-FITT506R07W-01	7	700	100	80	0.5	580*22*35	635*142*195	25
MDL-FITT509R10W-01	10	1000	100	80	0.5	880*22*34	935*142*195	25
MDL-FITT512R14W-01	14	1400	100	80	0.5	1180*22*35	1235*142*195	25
MDL-FITT503R04W-02	4	380	95	80	0.5	310*22*35	375*142*195	25
MDL-FITT506R07W-02	7	700	100	80	0.5	580*22*35	635*142*195	25
MDL-FITT509R10W-02	10	1000	100	80	0.5	880*22*34	935*142*195	25
MDL-FITT512R14W-02	14	1400	100	80	0.5	1180*22*35	1235*142*195	25

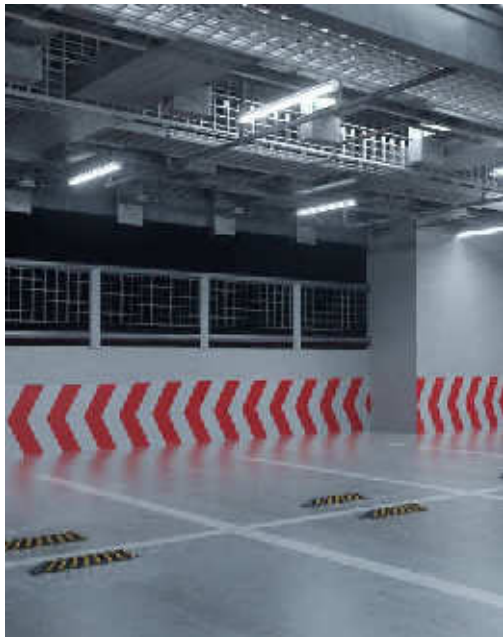

Product advantages



Application Place



Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-FITT806R08W	8	920	115	80	0.5	600*43*48	625*210*125	8
MDL-FITT812R16W	16	1840	115	80	0.5	1200*43*48	1225*210*125	8
MDL-FITT806R16W	16	1730	108	80	0.5	600*82*48	625*365*125	8
MDL-FITT812R30W	30	3240	108	80	0.9	1200*82*48	1225*365*125	8




LED Batten Basic


- Optimal heat management, Aluminum body
- Easily retrofit conventional fixtures with LED
- Up to 50% energy savings compared to fluorescent tube
- CE certification & EMC
- CCT:3000K/6500K is optional



Product advantages

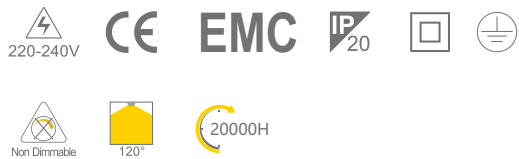

Application Place



Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-BLL0620W	20	1800	90	80	0.5	600*75*25	635*305*290	30
MDL-BLL1240W	40	3600	90	80	0.5	1200*75*25	1235*305*290	30
MDL-BLL0640W	40	3600	90	80	0.5	600*75*25	635*246*150	15
MDL-BLL1260W	60	5400	90	80	0.5	1200*75*25	1235*246*150	15
MDL-BLL1280W	80	7200	90	80	0.5	1200*75*25	1235*246*150	15



LED Waterproof



- Robust and reliable, good performance in poor and grid environment
- Low energy consumption, up to 50% energy savings
- IP65 protection
- CE certification & EMC
- CCT:3000K/6500K is optional



Product advantages



Application Place

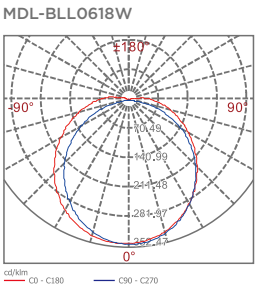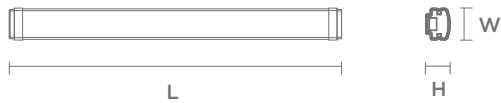

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-BLL0609W	9	1050	115	80	0.5	600*55*42	620*406*340	30
MDL-BLL0618W	18	1800	100	80	0.5	600*85*50	625*495*375	30
MDL-BLL1218W	18	1800	100	80	0.5	1200*55*42	1230*406*340	30
MDL-BLL1236W	36	3200	100	80	0.9	1200*85*50	1240*495*375	30



LED Bracket Basic


- Match with T8 tube
- SPCC body



Product advantages



Application Place

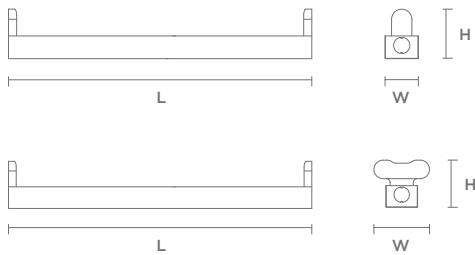

Model	SPEC	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-FIXT812D	1.2M	/	/	/	/	1216*34*48	1245*185*175	50
MDL-FIXT812S	2*1.2M	/	/	/	/	1216*72*34	1250*207*175	40
MDL-FIXT806D	0.6M	/	/	/	/	606*34*48	630*185*175	50
MDL-FIXT806S	2*0.6M	/	/	/	/	606*72*34	640*207*175	40



LED Bracket IP65


- IP65 protection level
- Match with T8 tube
- ABS body and PC cover



Product advantages



Application Place




Model	SPEC	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MZD1.2-T8/B-X/S	1.2M	/	/	/	/	1216*92*47	1253x200x88	10
MZD2*1.2-T8/B-X/S	2*1.2M	/	/	/	/	1216*33*47	1250x207x175	40
MZD0.6-T8/B-X/S	0.6M	/	/	/	/	606*92*47	643x200x88	10
MZD2X0.6-T8/B-X/S	2*0.6M	/	/	/	/	606*33*47	650x200x175	40



LED Linear Light


- Excellent structural design, suitable for multiple use
- Embedded/surfaced/suspended installtion is optional
- Metal lamp body, black/white lamp body is optional
- CE certification & EMC
- CCT:3000K/4000K/6500K is optional

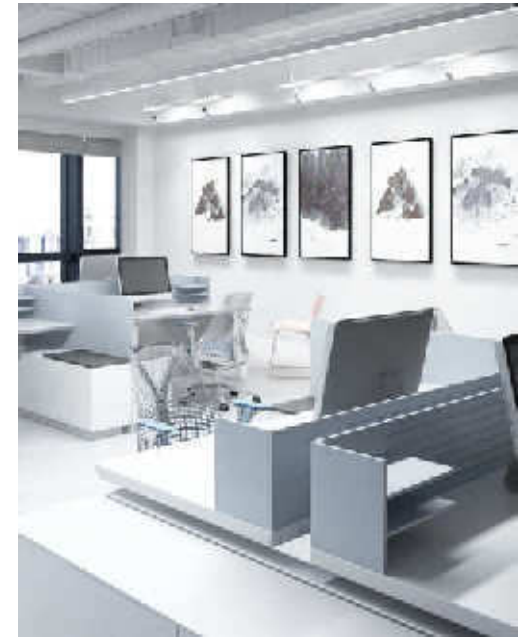

Product advantages



Application Place


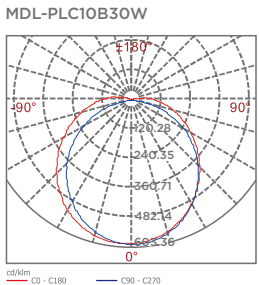


Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-PLC05B26W	26	2080	80	80	0.9	1200*50*60	1245*400*125	10
MDL-PLC10B30W	30	2400	80	80	0.9	1200*100*65	370*170*1265	4
MDL-PLC04B36W	36	2880	80	80	0.9	1200*54*28	1260*305*150	8
MDL-PLC08B36W	36	2880	80	80	0.9	1200*94*38	1260*305*150	4





LED Panel

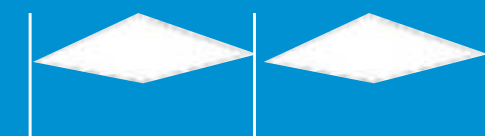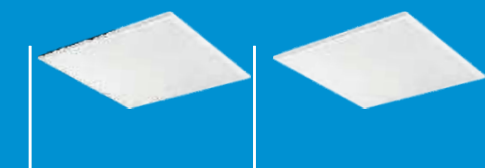

- 32 LED Panel Back-Lit IP20
- 33 LED Panel Back-Lit IP44
- 34 LED Panel Side-Lit IP20
- 35 LED Panel Side-Lit IP44
- 36 LED Kitchen Panel Back-Lit IP54



Product advantages



Application Place







LED Panel Back-Lit IP44

- High efficacy, up to 100lm/W
- Flicker-free brings comfort to working environment
- >25000hrs lifespan enables lower maintenance cost
- Embedded/surfaced/suspended installation is optional
- IP44 protection
- CB certification & EMC
- CCT:3000K/4000K/6500K is optional

Product advantages



Application Place

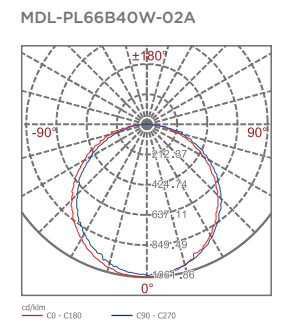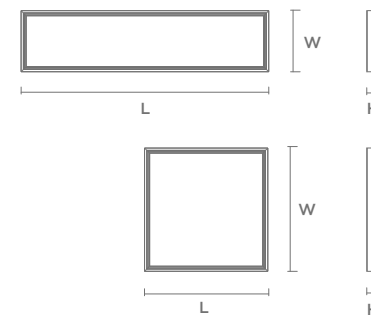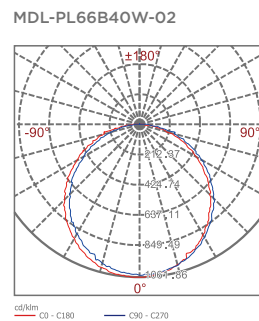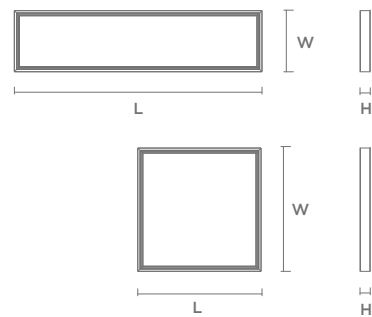


Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-PL66B40W-02	40	4000	100	80	0.9	595*595*30	665*650*275	6
MDL-PL66B48W-03	48	4800	100	80	0.9	595*595*30	665*650*275	6
MDL-PLC3B40W-02	40	4000	100	80	0.9	1195*295*30	1265*350*275	6
MDL-PLC3B48W-03	48	4800	100	80	0.9	1195*295*30	1265*350*275	6

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-PL66B40W-02A	40	4000	100	80	0.9	595*595*30	665*650*275	6
MDL-PL66B48W-03A	48	4800	100	80	0.9	595*595*30	665*650*275	6
MDL-PLC3B40W-02A	40	4000	100	80	0.9	1195*295*30	1265*350*275	6
MDL-PLC3B48W-03A	48	4800	100	80	0.9	1195*295*30	1265*350*275	6



LED Panel Side-Lit IP20

- Ultra slim design, as thin as 8mm
- New anti-yellowing material, GA60 guide plate
- Embedded/surfaced installation is optional
- 220-240V~/100-240V~ is optional
- CB certification & EMC
- CCT:3000K/4000K/6500K is optional

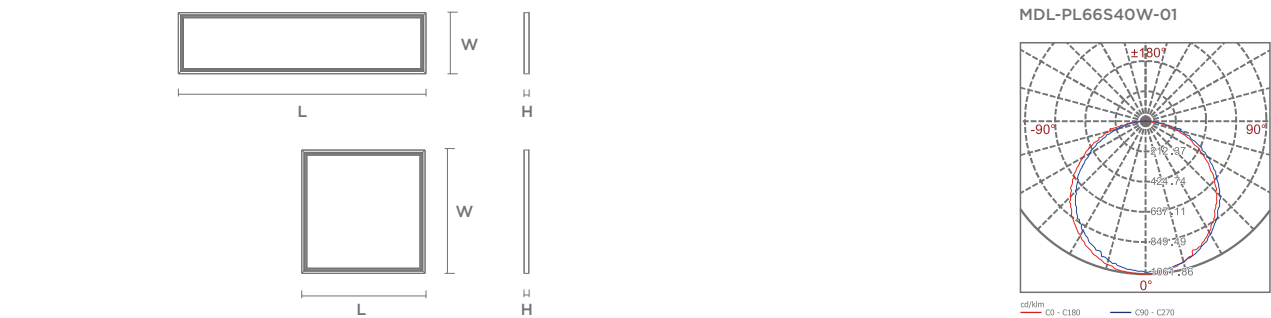

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-PL66S40W-01	40	4000	100	80	0.9	595*595*8	630*670*197	6
MDL-PLC3S40W-01	40	4800	100	80	0.9	1195*295*8	1280*197*340	6



Product advantages




Application Place



LED Panel Side-Lit IP44

- Ultra slim design, as thin as 8mm
- New anti-yellowing material, GA60 guide plate
- Embedded/surfaced installation is optional
- 220-240V~/100-240V~ is optional
- IP44 protection
- CB certification & EMC
- CT:3000K/4000K/6500K is optional

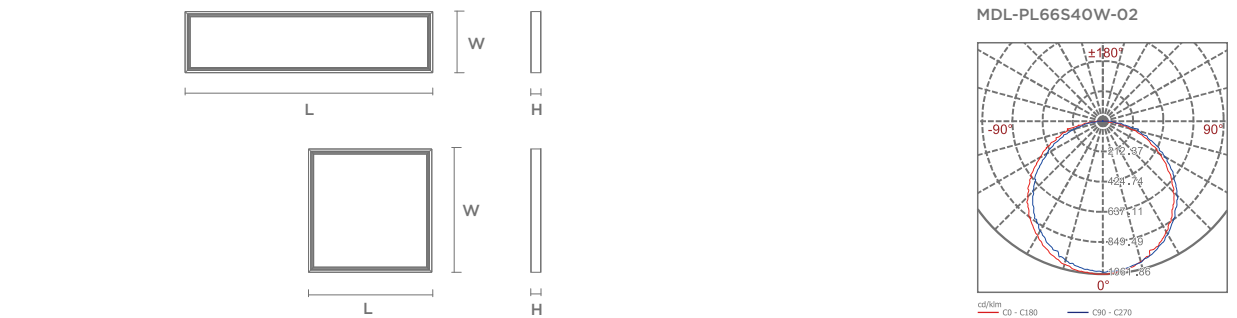

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-PL66S40W-02	40	4000	100	80	0.9	595*595*8	630*670*197	6
MDL-PLC3S40W-02	40	4800	100	80	0.9	1195*295*8	1280*197*340	6




Product advantages



Application Place



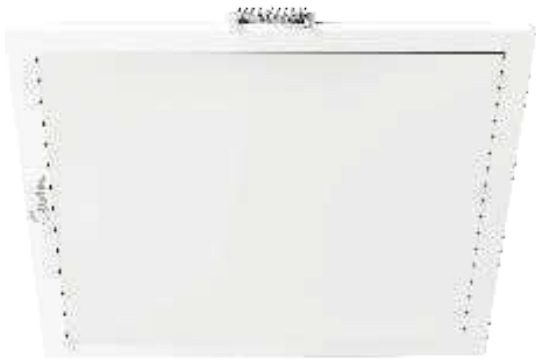

LED Kitchen Panel Back-Lit Ip44

- Flicker-free brings comfort to living environment
- >25000hrs lifespan enables lower maintenance cost
- Ip44 protection
- CE certification & EMC
- CCT:3000K/4000K/6500K is optional



Product advantages


220-240V


CE


EMC


IP44




Non Dimmable




120°


25000H

Application Place


Office


SCHOOL



Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-PL24W	24	1800	75	80	0.5	300*300*38	347*345*355	5





LED Ceiling Light



- 37 LED Ceiling Light IP20
- 38 LED Ceiling Light IP20 Square
- 39 LED Ceiling Light IP40
- 40 LED Bulkhead IP54



LED Ceiling Light IP20

- Minimalist design, excellent optical effect
- Flicker-free brings comfort to living environment
- Different covers are optional
- CE certification & EMC
- CCT:3000K/6500K is optional





Product advantages



Application Place



MDL-CLR24W-03

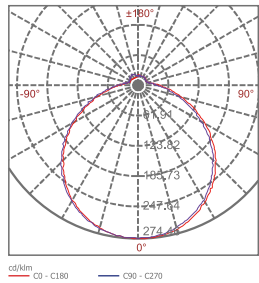

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-CLR06W-02	6	480	80	80	0.9	170*170*56	615*367*365	30
MDL-CLR10W-03	10	800	80	80	0.5	240*240*63	508*370*265	10
MDL-CLR12W-03	12	960	80	80	0.5	270*270*63	635*450*330	10
MDL-CLR16W-03	16	1280	80	80	0.5	340*340*79	550*400*390	5
MDL-CLR20W-03	20	1600	80	80	0.5	400*400*89	600*460*460	5
MDL-CLR24W-03	24	1920	80	80	0.5	400*400*89	600*460*460	5
MDL-CLR36W-04	36	2880	80	80	0.5	400*400*89	600*460*460	5



LED Ceiling Light IP20 Square

- Minimalist design, excellent optical effect
- Flicker-free brings comfort to living environment
- CE certification & EMC
- CCT:3000K/6500K is optional





Product advantages




Application Place



MDL-CL36W

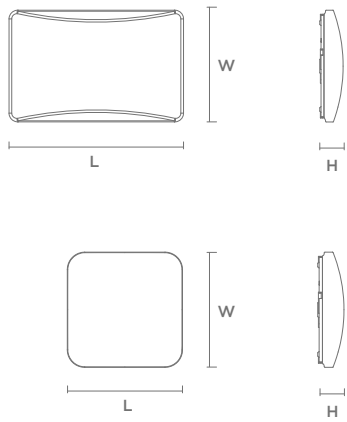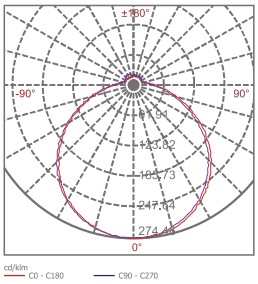



Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-CL36W	36	2880	80	80	0.9	330*330*75	560*405*390	5
MDL-CL60W	60	4800	80	80	0.9	500*320*75	560*116*380	1

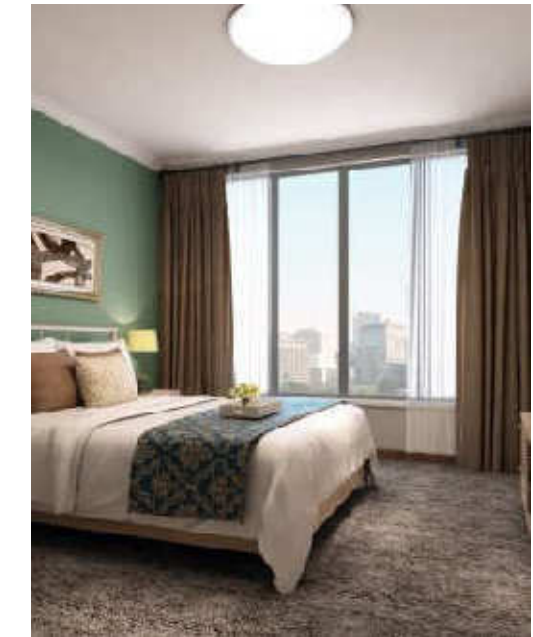

Product advantages



Application Place

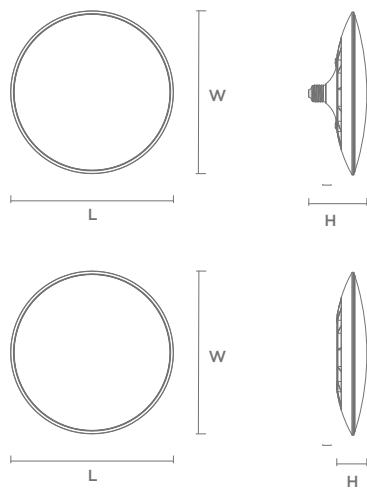


Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-CLR18W	18	1620	90	80	0.5	250*250*55	675*550*285	20
MDL-CLR24W	24	2160	90	80	0.5	370*370*60	780*675*400	20
MDL-CLR36W	36	2880	80	80	0.5	370*370*60	780*675*400	20
MDL-CLR45W	45	4050	90	80	0.5	460*60*65	830*485*485	10



LED Bulkhead IP54



- Outstanding waterproof design, IP54 protection
- Long life, up to 20000hrs, low maintenance
- High efficacy, up to 100lm/W
- CE certification & EMC
- CCT:3000K/6500K is optional

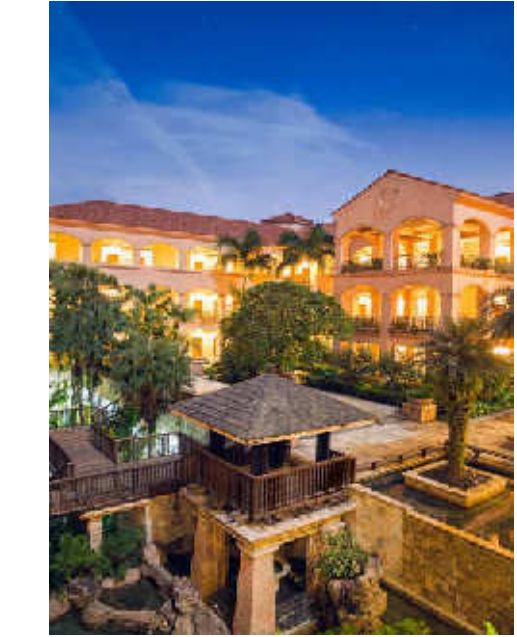

Product advantages



Application Place

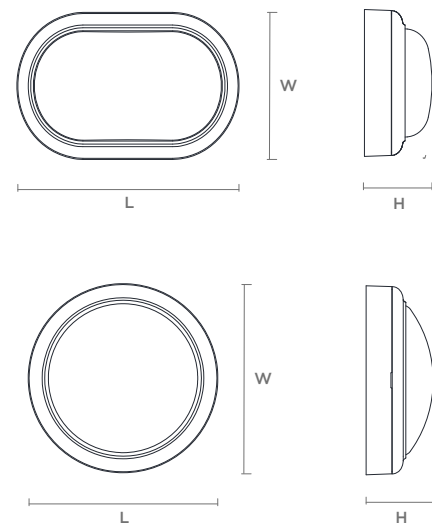

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-CLR08W-04	8	800	100	80	0.5	140*140*58	350*305*310	20
MDL-CLR15W-04	15	1500	100	80	0.5	180*180*66	380*380*385	20
MDL-CLSR08W-04	8	800	100	80	0.5	172*104*62	360*350*335	30
MDL-CLSR15W-04	15	1500	100	80	0.5	220*130*68	465*285*390	20




LED Strip Light





- 41 LED Strip Light SMD
- 42 LED Strip Light COB



Product advantages

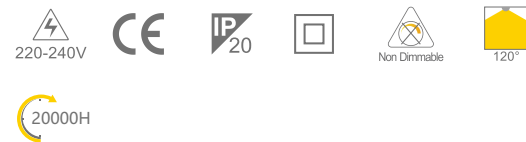

Application Place



Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W(mm)	CTN Size (mm)	PCS/CTN
MDL-SL6W	6	420	70	70	0.9	1000*14	330*330*155	50M
MDL-SL8W	8	480	60	80	0.9	1000*17	330*330*230	100M
MDL-SL8W-02	8	480	60	80	0.9	1000*17	330*330*230	100M
MDL-STD12W-02	12	840	70	80	0.9	1000*20	460*320*240	50M
MDL-STS4.5W-03	5	300	65	80	0.9	1000*12	330*330*230	100M
MDL-STS7.5W-03	8	500	65	80	0.9	1000*12	330*330*230	100M
MDL-STS12W-03	12	800	65	80	0.9	1000*15	330*330*230	100M





LED Strip Light COB

- Ultra-uniform optical effect
- Easy to install, good flexibility for any shape
- >20000hrs lifespan enables reduce maintenance cost
- CE certification
- CCT:2700K/4000K/6500K/RGB is optional

Product advantages



Application Place




Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W(mm)	CTN Size (mm)	PCS/CTN
MDL-SLC10W	10	800	80	90	1	42*8	150*150*20	5M
MDL-SLC12W	12	960	80	90	1	50*8	150*150*20	5M
MDL-SLC16W-CW	16	1280	80	90	1	25*8	150*150*20	5M
MDL-SLC16W-RGB	10	/	/	/	1	25*8	150*150*20	5M



LED High-Bay


- >50% energy savings than traditional high-bay
- Broad range of power for different applications
- IP65, suitable for different environment
- Multiple installation options, chain or rod mounting
- CB certification & EMC
- High efficacy, 120lm/w CCT:6500K

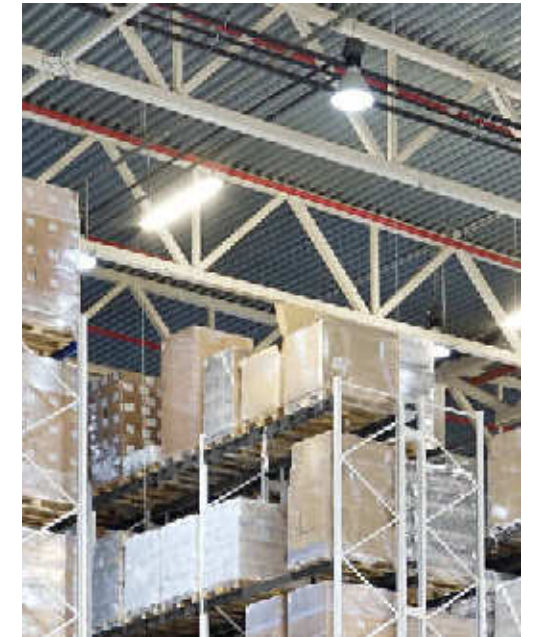


Product advantages



Application Place

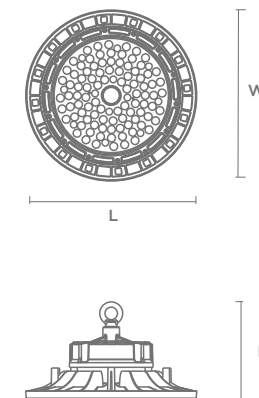

MDL-HB120W

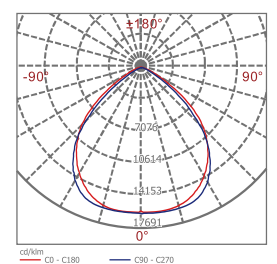

LED Highbay



43 LED High-Bay

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-HB60W	60	7200	120	80	0.9	260*260*120	525*525*170	4
MDL-HB80W	80	9600	120	80	0.9	260*260*120	525*525*170	4
MDL-HB100W	100	12000	120	80	0.9	260*260*120	525*525*170	4
MDL-HB120W	120	14400	120	80	0.9	260*260*120	525*525*170	4
MDL-HB150W	150	18000	120	80	0.9	302*302*127	340*340*205	1
MDL-HB200W	200	24000	120	80	0.9	345*345*130	385*385*210	1



LED Flood light




- 44 LED Flood Light Basic
- 45 LED Flood Light Professional
- 46 LED Flood Light Solar




LED Flood Light Basic

- >85% energy savings than traditional flood light
- Broad range of power for different applications
- IP65 protection, 2.5KV surge resistance
- CB certification & EMC
- High efficacy, 90lm/w CCT:6500K


Product advantages

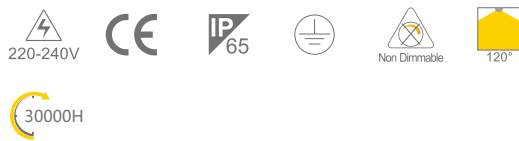

Application Place

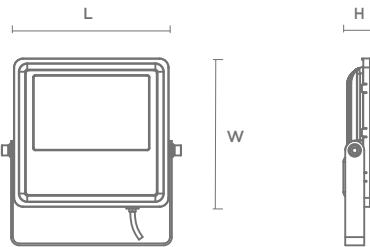

MDL-FLFC100W

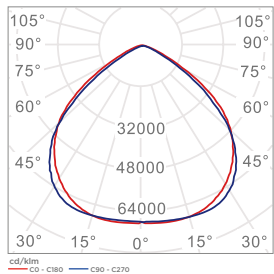

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-FLF10W-05	10	80	80	80	0.5	130*110*23	430*295*325	40
MDL-FLF20W-05	20	1500	75	80	0.5	130*110*23	430*295*325	40
MDL-FLFC10W	10	900	90	80	0.9	113*117*31	389*232*310	36
MDL-FLFC20W	20	1800	90	80	0.9	113*117*31	389*232*310	36
MDL-FLFC30W	30	2700	90	80	0.9	138*142*31	329*245*216	12
MDL-FLFC50W	50	4500	90	80	0.9	171*177*32	399*257*251	12
MDL-FLFC100W	100	9000	90	80	0.9	245*255*40	301*280*333	6
MDL-FLFC150W	150	13500	90	80	0.9	289*299*48	329*239*374	4
MDL-FLFC200W	200	18000	90	80	0.9	342*354*55	384*265*429	4


LED Flood Light Professional

- >85% energy savings than traditional flood light
- Broad range of power for different applications
- IP65 protection, 2.5KV surge resistance
- CB certification & EMC
- High efficacy, 100lm/w CCT:3000K/6500K


Product advantages



Application Place

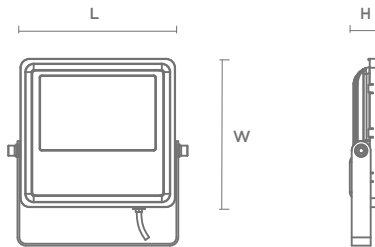

MDL-FLFB100W

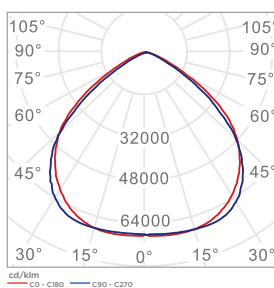



Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-FLFB30W	30	2400	80	80	0.9	161*182*38	361*244*213	10
MDL-FLFB50W	50	5000	100	80	0.9	202*221*42	269*230*243	5
MDL-FLFB100W	100	10000	100	80	0.9	283*295*42	329*299*324	4
MDL-FLFB150W	150	15000	100	80	0.9	353*353*47	401*95*364	1
MDL-FLFB200W	200	20000	100	80	0.9	385*396*49	432*106*410	1



Product advantages



Application Place

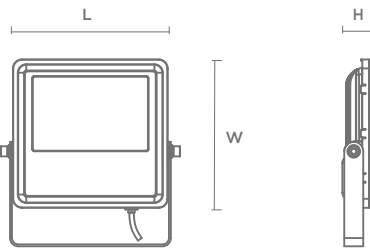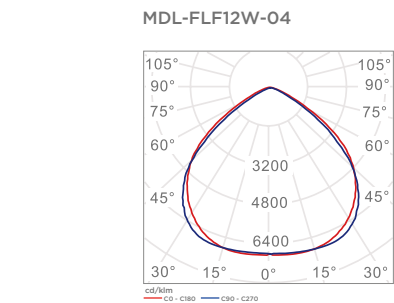


Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-FLF12W-04	12W	1500	125	80	/	P:350*350*16 S:262*192*55	425*425*130	1
MDL-FLF20W-04	20W	2500	138	80	/	P:530*350*17 S:290*228*55	605*425*130	1





LED Street light

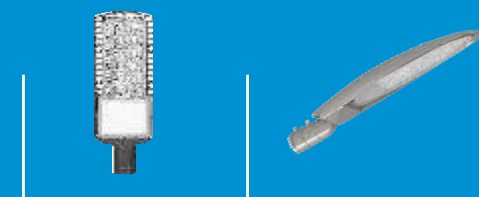

- 47 LED Street Light Basic
- 48 LED Street Light Professional
- 49 LED Street Light Solar




LED Street Light Basic

- Broad range of power for different applications
- Aluminum fin heatsink, good heat dissipation
- IK08 and IP65 protection
- CE certification & EMC
- High efficacy, 130lm/w CCT:6500K


Product advantages



Application Place

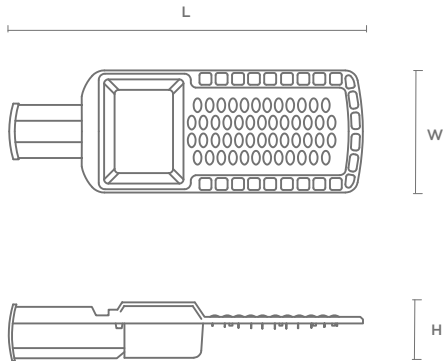

MDL-SL40W-03

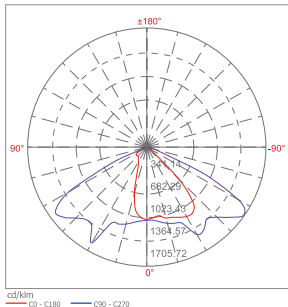

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-SL20W-03	20	2400	120	70	0.9	345*128*55	390*165*110	1
MDL-SL40W-03	40	4800	120	70	0.9	390*142*65	435*180*110	1




LED Street Light Professional

- Broad range of power for different applications
- Aluminum fin heatsink, good heat dissipation
- IK08 and IP65 protection
- CE certification & EMC
- High efficacy, 110lm/w CCT:6500K


Product advantages



Application Place

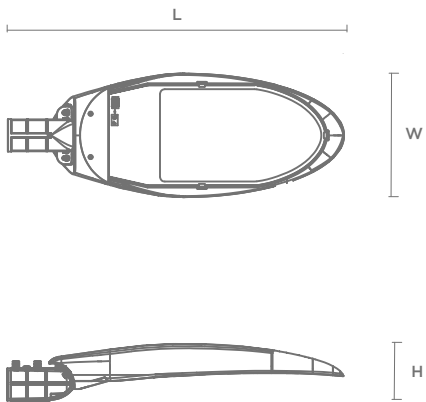

MDL-SLW150W

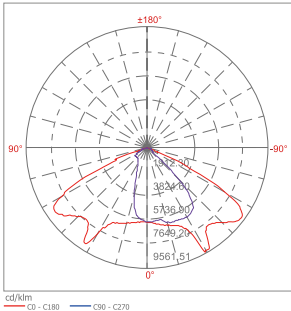

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-SLW50W	50	5500	110	80	0.9	495*146*95	551*213*208	2
MDL-SLW100W	100	11000	110	80	0.9	599*190*108	657*245*261	2
MDL-SLW150W	150	16500	110	80	0.9	645*237*130	702*280*308	2



LED Street Light Solar



- Polycrystalline silicon solar panel, 5h full charge
- LiFePO4 battery, up to 2000 charge-discharge cycles
- Smart radar control and remote control
- IP65 protection
- High efficacy, 160lm/w CCT:6500K



Product advantages



Application Place

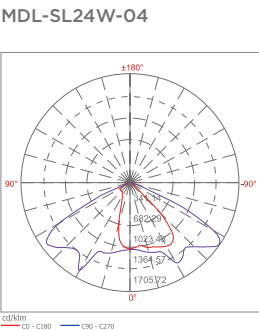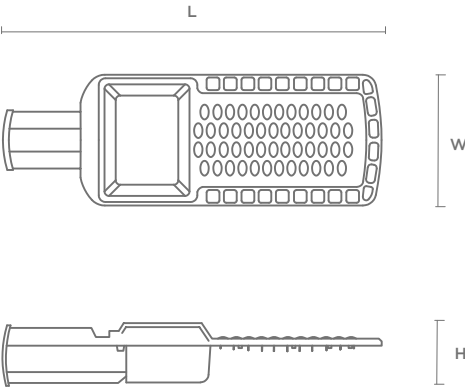

Model	Power (W)	Lumen (lm)	Efficacy (lm/W)	CRI	PF	Product Size L*W*H(mm)	CTN Size (mm)	PCS/CTN
MDL-SL12W-04	12	2000	160	80	/	P:377*168*78 S:350*350*17	640*480*140	1
MDL-SL18W-04	18	2880	160	80	/	P:377*168*78 S:530*350*17	640*480*140	1
MDL-SL24W-04	24	3840	160	80	/	P:560*230*93 S:670*445*25	760*550*170	1

